


DL1501240

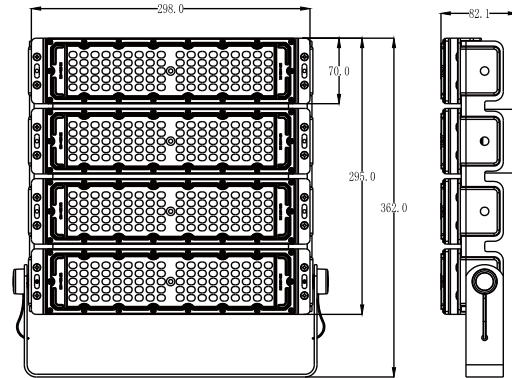

GENERAL DATA

Luminaire type	Tunnel light
Installation	Surfaced
Environment	Outdoor
Light source	LED
Body material	Powder coated aluminum
Optic material	Polycarbonate (PC)
Finish color	Silver
Standard	CE

deolighting.com



DL1501240

ELECTRICAL DATA

Power	240W
Input volt	90-305Vac
Frequency	50/60Hz
Connections	Live, Earth, Neutral
Class	I, must be earthed

LIGHTING DATA

Luminous flux	31,000±5% lm
LED color	2700-6500K
Color rendering index	80 Ra



LIGHT SOURCE DATA

LED brand	Lumileds
LED type	3030
LED quantity	288 pcs

POWER SUPPLY DATA

Brand	Meanwell HLG series
Power Factor	0.95
Dimmable	No

PHOTOMETRICS

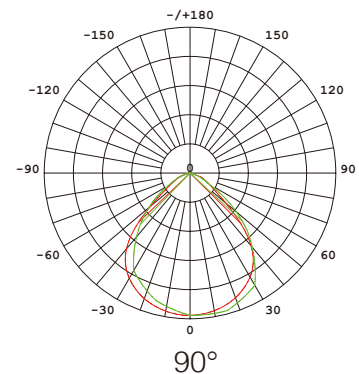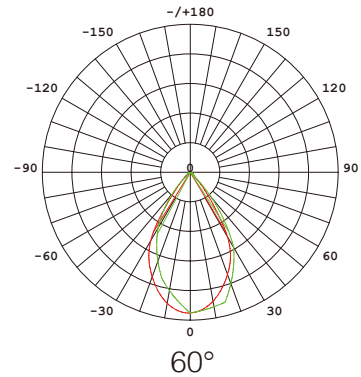

DL1501240

MECHANICAL DATA

IP rating	IP67
IK rating	IK10
Beam angle	60°, 90°
Operating	-20 ~ +50°C
Lifespan	50,000 hrs

OPTIONAL CONTROL

1-10V Dimmable

DALI Control