


DL2901100

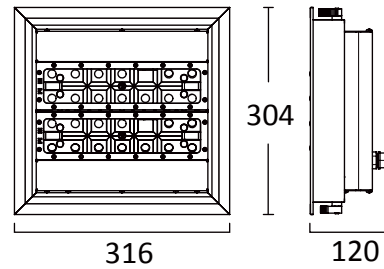

GENERAL DATA

Luminaire type	Canopy
Installation	Recessed
Environment	Indoor, outdoor
Light source	LED
Body material	Aluminum alloy
Optic material	Polycarbonate (PC)
Finish color	Silver grey
Standard	CE, ATEX

deolighting.com



DL2901100

ELECTRICAL DATA

Power	100W
Input volt	90-305Vac
Frequency	50/60Hz
Connections	Live, Earth, Neutral
Class	I, must be earthed

LIGHTING DATA

Luminous flux	13,000±5% lm
LED color	2700-6500K
Color rendering index	80 Ra


LIGHT SOURCE DATA

LED brand	Lumileds
LED type	3030
LED quantity	128 pcs


POWER SUPPLY DATA

Brand	Meanwell HLG series
Power Factor	0.95
Dimmable	No


PHOTOMETRICS

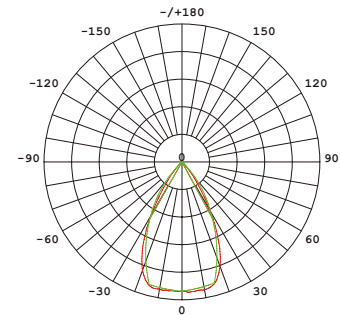

60°

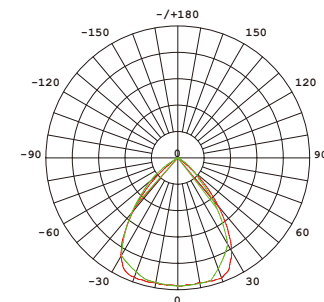

90°

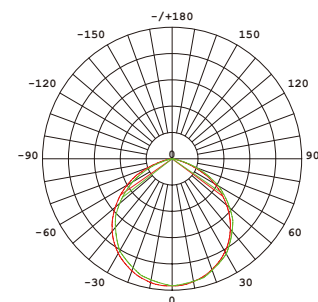

110°

DL2901100

MECHANICAL DATA

IP rating	IP66
IK rating	IK10
Beam angle	60°, 90°, 110°
Operating	-20 ~ +50°C
Lifespan	50,000 hrs

OPTIONAL CONTROL

1-10V Dimmable