


DL2901150

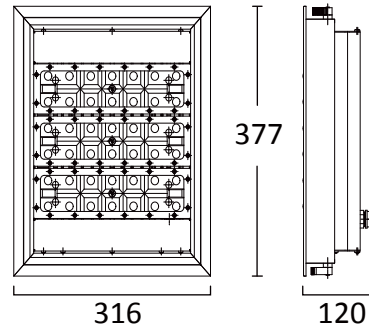

## GENERAL DATA

Luminaire type	Canopy
Installation	Recessed
Environment	Indoor, outdoor
Light source	LED
Body material	Aluminum alloy
Optic material	Polycarbonate ( PC )
Finish color	Silver grey
Standard	CE, ATEX

[deolighting.com](http://deolighting.com)



DL2901150

## ELECTRICAL DATA

Power	150W
Input volt	90-305Vac
Frequency	50/60Hz
Connections	Live, Earth, Neutral
Class	I, must be earthed

## LIGHTING DATA

Luminous flux	19,500±5% lm
LED color	2700-6500K
Color rendering index	80 Ra


## LIGHT SOURCE DATA

LED brand	Lumileds
LED type	3030
LED quantity	192 pcs


## POWER SUPPLY DATA

Brand	Meanwell HLG series
Power Factor	0.95
Dimmable	No


## PHOTOMETRICS

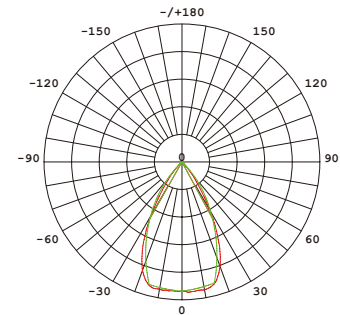

60°

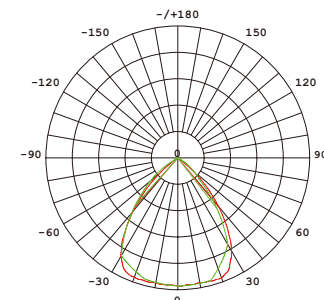

90°

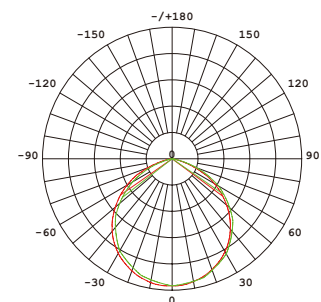

110°

DL2901150

## MECHANICAL DATA

IP rating	IP66
IK rating	IK10
Beam angle	60°, 90°, 110°
Operating	-20 ~ +50°C
Lifespan	50,000 hrs

## OPTIONAL CONTROL

1-10V Dimmable