


## PRODUCT DATASHEET

Last information update: May 2023

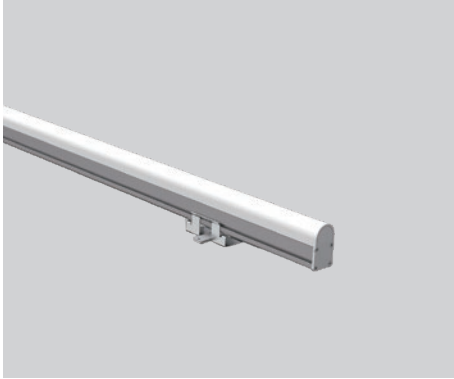

## UNI-LINE DOME 1000MM

2608W15

Architectural linear LED wallwasher for outdoor applications

### Technical Features

Power	15W
Input voltage	DC24V ( constant voltage )
Insulation class	III
Delivered flux	1,100 lm ±10%
Light distribution type	direct-view
Beam angle	120°
Light colour / CCT	2700K, 3000K, 4000K
CRI	80
Source type	LED
LED number	60
MacAdam step	5
Power supply	Not included
Control	ON/OFF
Protection index	IP65
Impact resistance	IK05
Lifetime	50,000 hours Ta=25°C

### Construction

Anodized extruded aluminum body, polycarbonate diffuser.

### Temperature Limits

Ambient operating temperature	from -20°C to +50°C
Storage temperature	from -40°C to +70°C

### Installation

Surface mounted with bracket ( non-adjustable ).


### Finish Colours

Alumunim as standard colour, RAL colours on request.


### Wiring

Power input cable MALE connector 200mm

Power output cable FEMALE connector 200mm




## Optional Accessories



with female 2-pin waterproof connector for Power  
\* specify cable length to complete order

leader cable



with male and female 2-pin waterproof connector for Power  
\* specify cable length to complete order

extension cable

## Ordering Information

example: **2608W15.0120.2780.01+LC2**

2608W15 · [ ] · [ ] · [ ] + [ ]

product	beam angle	light colour / CCT	finish colour	accessory
UNI-LINE DOME 1000MM 15W	<b>0120</b> 120°	<b>2780</b> 2700K RA80	<b>01</b> aluminum	<b>LC2</b> leader cable
		<b>3080</b> 3000K RA80		<b>EC2</b> extension cable
		<b>4080</b> 4000K RA80		