


PRODUCT DATASHEET

Last information update: May 2023

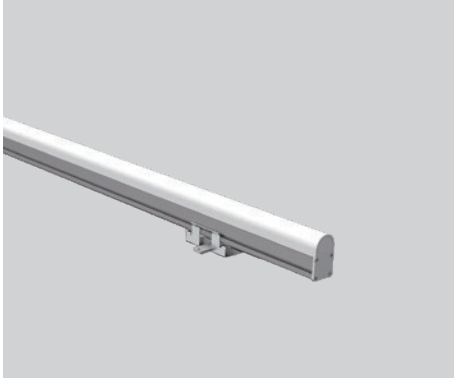

UNI-LINE DOME 1000MM

2608W15

Architectural linear LED wallwasher for outdoor applications

Technical Features

| | |
|-------------------------|----------------------------|
| Power | 15W |
| Input voltage | DC24V (constant voltage) |
| Insulation class | III |
| Delivered flux | 670 lm ±10% |
| Light distribution type | direct-view |
| Beam angle | 120° |
| Light colour / CCT | RGBW |
| CRI | - |
| Source type | LED (4-IN-1) |
| LED number | 60 |
| MacAdam step | - |
| Power supply | Not included |
| Control | DMX512 |
| Pixel | 10 / meter |
| Protection index | IP65 |
| Impact resistance | IK05 |
| Lifetime | 50,000 hours Ta=25°C |



Construction

Anodized extruded aluminum body, polycarbonate diffuser.

Temperature Limits

| | |
|-------------------------------|---------------------|
| Ambient operating temperature | from -20°C to +50°C |
| Storage temperature | from -40°C to +70°C |

Installation


Surface mounted with bracket (non-adjustable).

Finish Colours


Aluminum as standard colour, RAL colours on request.

Wiring

Power/DMX input cable MALE connector 500mm
Power/DMX output cable FEMALE connector 500mm

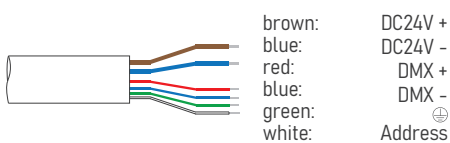


Optional Accessories



with female 6-pin waterproof connector for DMX
* specify cable length to complete order

leader cable



with male and female 6-pin waterproof connector for DMX
* specify cable length to complete order

extension cable

Ordering Information

example: 2608W15.0120.4130K.01+LC6

2608W15 · [] · [] · [] + []

| product | beam angle | light colour / CCT | finish colour | accessory |
|-----------------------------|------------|--------------------|---------------|---------------------|
| UNI-LINE DOME 1000MM 15W | 0120 120° | 4130K RGB+3000K | 01 aluminum | LC6 leader cable |
| | | 4140K RGB+4000K | | EC6 extension cable |