



PRODUCT DATASHEET

Last information update: May 2023

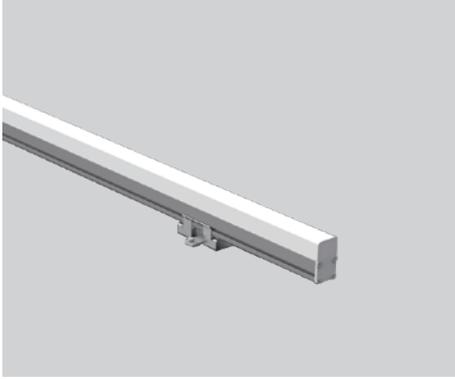

UNI-LINE FLAT 1000MM

2607W15

Architectural linear LED wallwasher for outdoor applications

Technical Features

| | |
|-------------------------|----------------------------|
| Power | 15W |
| Input voltage | DC24V (constant voltage) |
| Insulation class | III |
| Delivered flux | 1,100 lm ±10% |
| Light distribution type | direct-view |
| Beam angle | 120° |
| Light colour / CCT | 2700K, 3000K, 4000K |
| CRI | 80 |
| Source type | LED |
| LED number | 60 |
| MacAdam step | 5 |
| Power supply | Not included |
| Control | ON/OFF |
| Protection index | IP65 |
| Impact resistance | IK05 |
| Lifetime | 50,000 hours Ta=25°C |

Construction

Anodized extruded aluminum body, polycarbonate diffuser.

Temperature Limits

| | |
|-------------------------------|---------------------|
| Ambient operating temperature | from -20°C to +50°C |
| Storage temperature | from -40°C to +70°C |

Installation

Surface mounted with bracket (non-adjustable).


Finish Colours

Alumunim as standard colour, RAL colours on request.

Wiring

Power input cable MALE connector 200mm

Power output cable FEMALE connector 200mm




Optional Accessories



with female 2-pin waterproof connector for Power
* specify cable length to complete order

leader cable



with male and female 2-pin waterproof connector for Power
* specify cable length to complete order

extension cable

Ordering Information

example: **2607W15.0120.2780.01+LC2**

2607W15 · [] · [] · [] + []

| product | beam angle | light colour / CCT | finish colour | accessory |
|-----------------------------|------------------|------------------------|--------------------|----------------------------|
| UNI-LINE FLAT 1000MM 15W | 0120 120° | 2780 2700K RA80 | 01 aluminum | LC2 leader cable |
| | | 3080 3000K RA80 | | EC2 extension cable |
| | | 4080 4000K RA80 | | |