

PRODUCT DATASHEET

Last information update: May 2023




YORK L 1000MM

2508W200

Architectural linear LED wallwasher for outdoor applications

Technical Features

Power	200W
Input voltage	AC100-240V
Insulation class	I
Delivered flux	9,000 lm ±10%
Light distribution type	symmetrical / elliptical
Beam angle	9°, 15°, 20°, 30°, 45° / 15°x60°
Light colour / CCT	RGBW
CRI	-
Source type	LED (4-IN-1)
LED number	24
MacAdam step	-
Power supply	included
Control	DMX512
Protection index	IP66
Impact resistance	IK07
Lifetime	50,000 hours Ta=25°C

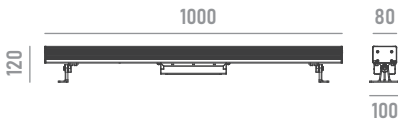

Construction

Anodized extruded aluminum body, tempered glass cover, polycarbonate optical lenses.

Temperature Limits

Ambient operating temperature	from -20°C to +50°C
Storage temperature	from -40°C to +70°C

Installation


Surface mounted with adjustable bracket.

Finish Colours


Aluminum as standard colour, RAL colours on request.

Wiring

Power input cable OPEN END 500mm
DMX input cable MALE connector 500mm
DMX output cable FEMALE connector 500mm

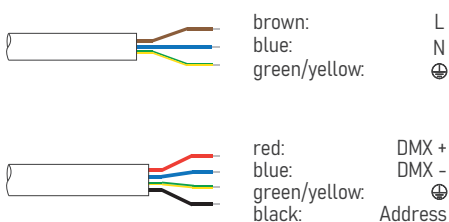


Optional Accessories




anti-glare accessory for improved visual comfort
*can not be ordered separately


honeycomb



anti-glare accessory for improved visual comfort
*can not be ordered separately




visor



with female 4-pin waterproof connector for DMX
* specify cable length to complete order

leader cable



with male and female 4-pin waterproof connector for DMX
* specify cable length to complete order

extension cable

Ordering Information

example: 2508W200.0009.4130K.01+A1

2508W200 · [] · [] · [] + []

product	beam angle	light colour / CCT	finish colour	accessory
YORK L 1000MM 200W	0009 9°	4130K RGB+3000K	01 aluminum	A1 honeycomb
	0015 15°	4140K RGB+4000K		A2 visor
	0020 20°			LC4 leader cable
	0030 30°			EC4 extension cable
	0045 45°			
	1560 15°x60°			