

PRODUCT DATASHEET

Last information update: May 2023




YORK M 1000MM

2504W72

Architectural linear LED wallwasher for outdoor applications

Technical Features

| | |
|-------------------------|----------------------|
| Power | 72W |
| Input voltage | AC100-240V |
| Insulation class | I |
| Delivered flux | 3,600 lm ±10% |
| Light distribution type | symmetrical |
| Beam angle | ultra spot 2.5° |
| Light colour / CCT | 2700K, 3000K, 4000K |
| CRI | 80 |
| Source type | LED |
| LED number | 20 |
| MacAdam step | 5 |
| Power supply | included |
| Control | ON/OFF |
| Protection index | IP66 |
| Impact resistance | IK07 |
| Lifetime | 50,000 hours Ta=25°C |

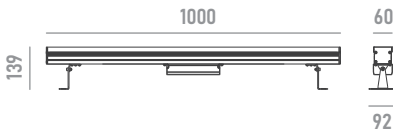

Construction

Anodized extruded aluminum body, tempered glass cover, polycarbonate optical lenses.

Temperature Limits

| | |
|-------------------------------|---------------------|
| Ambient operating temperature | from -20°C to +50°C |
| Storage temperature | from -40°C to +70°C |

Installation

Surface mounted with adjustable bracket.

Finish Colours


Alumunim as standard colour, RAL colours on request.

Wiring

Power input cable OPEN END 500mm




Optional Accessories




anti-glare accessory for improved visual comfort
*can not be ordered separately

honeycomb



anti-glare accessory for improved visual comfort
*can not be ordered separately



visor

Ordering Information

example: 2504W72.0002.2780.01+A1

2504W72 · [] · [] · [] + []

| product | beam angle | light colour / CCT | finish colour | accessory |
|----------------|------------------|------------------------|--------------------|---------------------|
| YORK M 1000MM | 0002 2.5° | 2780 2700K RA80 | 01 aluminum | A1 honeycomb |
| 72W ULTRA SPOT | | 3080 3000K RA80 | | A2 visor |
| | | 4080 4000K RA80 | | |