


## PRODUCT DATASHEET

Last information update: May 2023

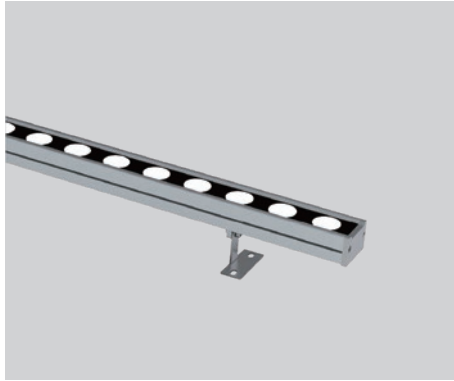


### YORK S 1000MM

2506W24

Architectural linear LED wallwasher for outdoor applications

#### Technical Features

Power	24W
Input voltage	DC24V ( constant voltage )
Insulation class	III
Delivered flux	1,920 lm ±10%
Light distribution type	symmetrical / elliptical
Beam angle	20°, 30°, 45°, 60° 20°x40°, 18°x50°
Light colour / CCT	2700K, 3000K, 4000K
CRI	80
Source type	LED
LED number	24
MacAdam step	5
Power supply	Not included
Control	ON/OFF
Protection index	IP66
Impact resistance	IK07
Lifetime	50,000 hours Ta=25°C

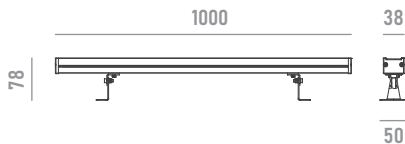

#### Construction

Anodized extruded aluminum body, tempered glass cover, polycarbonate optical lenses.

#### Temperature Limits

Ambient operating temperature	from -20°C to +50°C
Storage temperature	from -40°C to +70°C

#### Installation

Surface mounted with adjustable bracket.

#### Finish Colours


Alumunim as standard colour, RAL colours on request.

#### Wiring

Power input cable MALE connector 500mm  
Power output cable FEMALE connector 500mm




Optional Accessories



anti-glare accessory for improved visual comfort  
\*can not be ordered separately


honeycomb



anti-glare accessory for improved visual comfort  
\*can not be ordered separately




visor



with female 2-pin waterproof connector for Power  
\* specify cable length to complete order

leader cable



with male and female 2-pin waterproof connector for Power  
\* specify cable length to complete order

extension cable

Ordering Information

example: 2506W24.0020.2780.01+A1

2506W24 · [ ] · [ ] · [ ] + [ ]

product	beam angle	light colour / CCT	finish colour	accessory
YORK S 1000MM 24W	0020 20°	2780 2700K RA80	01 aluminum	A1 honeycomb
	0030 30°	3080 3000K RA80		A2 visor
	0045 45°	4080 4000K RA80		LC2 leader cable
	0060 60°			EC2 extension cable
	2040 20°x40°			
	1850 18°x50°			