

PRODUCT DATASHEET

Last information update: May 2023



BLADE L

2021W36

Light effect LED luminaires for illuminating window reveals

Technical Features

Power	36W
Input voltage	DC24V (constant voltage)
Insulation class	III
Delivered flux	1,100 lm ±10%
Light distribution type	elliptical
Beam angle	2°x120°
Light colour / CCT	RGBW
CRI	-
Source type	LED
LED number	16
MacAdam step	-
Power supply	Not included
Control	DMX512
Protection index	IP65
Impact resistance	IK05
Lifetime	50,000 hours Ta=25°C



Construction

Fluorocarbon painted die-cast aluminum body, polycarbonate optical lenses.

Temperature Limits

Ambient operating temperature	from -20°C to +50°C
Storage temperature	from -40°C to +70°C

Installation


Surface mounted with adjustable bracket.

Finish Colours

RAL9023 as standard colour, other RAL colours on request.

Wiring

Power/DMX input cable MALE connector 500mm

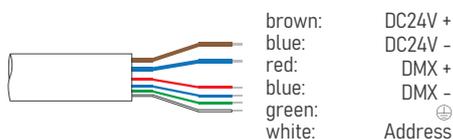

Optional Accessories



with female 6-pin waterproof connector for DMX
 * specify cable length to complete order

leader cable

Ordering Information

example: 2021W36.RGB30K.01+LC6

2021W36 · [] · [] · [] + []

product	light colour / CCT	finish colour	accessory
BLADE L 36W	RGB30K RGB+3000K RGB40K RGB+4000K	01 RAL9023	LC6 leader cable