


PRODUCT DATASHEET

Last information update: Mar. 2025



Wiring

Power/DMX input cable MALE connector 1,000 mm
Power/DMX output cable FEMALE connector 1,000 mm

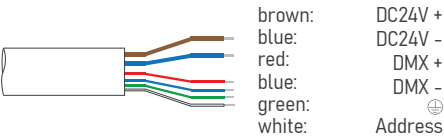

BLADE-L

2021W36

LED window accent light for outdoor applications

Technical Features

Power	36W
Input voltage	DC24V (constant voltage)
Insulation class	III
Delivered flux	1,100 lm ±10%
Light distribution type	Elliptical
Beam angle	2°x180°
Light colour / CCT	RGBW
CRI	-
Source type	LED
LED number	16
MacAdam step	-
Power supply	Not included
Control	DMX512 (built-in DMX decoder)
Protection index	IP65
Impact resistance	IK05
Lifetime	50,000 hours Ta=25°C

Construction

High weather-resistant fluorocarbon painted die-cast aluminum body, PC optical lenses.

Temperature Limits

Ambient operating temperature	from -20°C to +50°C
Storage temperature	from -40°C to +70°C


Installation

Surface mounted with adjustable bracket (standard).

Finish Colours


RAL9023 Pearl Dark Grey (standard). Other RAL colours on request.

Optional Accessories



leader cable with female 6-pin waterproof connector for Power/DMX
* specify cable length to complete order

LC6



extension cable with male and female 6-pin waterproof connector for Power/DMX
* specify cable length to complete order

EC6

Ordering Information

example: 2021W36.RGB30K.01+LC6(specify length)

2021W36 · [] · [] + []

product	light colour / CCT		finish colour		accessory	
BLADE-L-36W	RGB30K	RGB+3000K	01	RAL9023	LC6	leader cable
	RGB40K	RGB+4000K			EC6	extension cable