

PRODUCT DATASHEET

Last information update: Mar. 2025



BLADE-S

2019W3

LED window accent light for outdoor applications

Technical Features

Power	3W
Input voltage	DC12V (constant voltage)
Insulation class	III
Delivered flux	90 lm ±10%
Light distribution type	Elliptical
Beam angle	2°x180°
Light colour / CCT	RGBW
CRI	-
Source type	LED
LED number	12
MacAdam step	-
Power supply	Not included
Control	DMX512 (built-in DMX decoder)
Protection index	IP65
Impact resistance	IK05
Lifetime	50,000 hours Ta=25°C



Construction

High weather-resistant fluorocarbon painted die-cast aluminum body, PC optical lenses.

Temperature Limits

Ambient operating temperature	from -20°C to +50°C
Storage temperature	from -40°C to +70°C

Installation

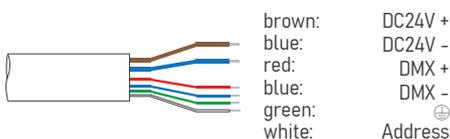
Surface mounted with base (standard).

Finish Colours

RAL9023 Pearl Dark Grey (standard). Other RAL colours on request.



Wiring

Power/DMX input cable OPEN END 1,000 mm



Ordering Information

example: **2019W3.RGB30K.01**

2019W3 ·  · 

product	light colour / CCT	finish colour
BLADE-S-3W	RGB30K RGB+3000K	01 RAL9023
	RGB40K RGB+4000K	