



PRODUCT DATASHEET

Last information update: Mar. 2025



Wiring

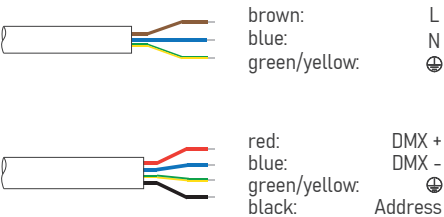Power input cable OPEN END 1,000 mm
DMX input cable MALE connector 1,000 mm
DMX output cable FEMALE connector 1,000 mm



CUBE-16

0822W100

Architectural LED floodlight for outdoor applications

Technical Features

Power	100W
Input voltage	AC100-240V
Insulation class	4,000 lm ±10%
Delivered flux	Symmetrical / elliptical
Light distribution type	10°, 15°, 20°, 30° / 15°x60°
Beam angle	RGBCLAW
Light colour / CCT	-
CRI	LED (7-IN-1)
Source type	16
LED number	-
MacAdam step	Built-in
Power supply	DMX512 (built-in DMX decoder)
Control	IP66
Protection index	IK08
Impact resistance	50,000 hours Ta=25°C
Lifetime	

Construction

High weather-resistant fluorocarbon painted die-cast aluminum body, tempered glass cover, polycarbonate optical lenses.

Temperature Limits

Ambient operating temperature	from -20°C to +50°C
Storage temperature	from -40°C to +70°C










Installation


Surface mounted with adjustable base (standard).

Finish Colours

RAL9023 Pearl Dark Grey (standard). Other RAL colours on request.


Optional Accessories

	anti-glare grille (for models with optics <= 30°) *can not be ordered separately	A01
	honeycomb louvre *can not be ordered separately	A02
	anti-glare visor *can not be ordered separately	 A06
	U-bracket *can not be ordered separately	 A11
	adapter (for Φ48mm poles) *can not be ordered separately	 A12
	clamp (for Φ114mm poles) *can not be ordered separately	 A13
	plate (for Φ67~325mm T>=4 poles) *can not be ordered separately	 A14
	strap (for Φ168~268mm trees) *can not be ordered separately	 A15



leader cable with female 4-pin waterproof connector for DMX
* specify cable length to complete order

LC4



extension cable with male and female 4-pin waterproof connector for DMX
* specify cable length to complete order

EC4

Ordering Information

example: 0822W100.0010.7140K.01+A01

0822W100 · · · +

product	beam angle		light colour / CCT		finish colour	accessory	
CUBE-16-100W	0010	10°	7140K	RGBCLA+4000K	01 RAL9023	A01	anti-glare grille
	0015	15°				A02	honeycomb louvre
	0020	20°				A06	anti-glare visor
	0030	30°				A11	U-bracket
	1560	15°x60°				A12	pole adapter
						A13	pole clamp
						A14	pole plate
						A15	strap
						LC4	leader cable
						EC4	extension cable