

PRODUCT DATASHEET

Last information update: Mar. 2025



DELTA-36

0819W240

Linear LED wallwasher for outdoor applications

Technical Features

Power	240W
Input voltage	AC100-240V
Insulation class	I
Delivered flux	10,800 lm ±10%
Light distribution type	Symmetrical / elliptical
Beam angle	9°, 15°, 20°, 30°, 45° / 15°x60°
Light colour / CCT	RGBW
CRI	-
Source type	LED (4-IN-1)
LED number	36
MacAdam step	-
Power supply	Built-in
Control	DMX512 (built-in DMX decoder)
Protection index	IP66
Impact resistance	IK07
Lifetime	50,000 hours Ta=25°C

Construction

High weather-resistant fluorocarbon painted extruded aluminum body, tempered glass cover, polycarbonate optical lenses.

Temperature Limits

Ambient operating temperature	from -20°C to +50°C
Storage temperature	from -40°C to +70°C

Installation


Surface mounted with adjustable bracket (standard).

Finish Colours


RAL9023 Pearl Dark Grey (standard). Other RAL colours on request.

Wiring

Power input cable OPEN END 1,000 mm
DMX input cable MALE connector 1,000 mm
DMX output cable FEMALE connector 1,000 mm

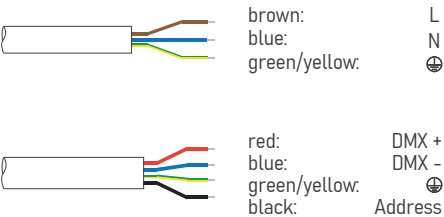


Optional Accessories




honeycomb louvre
*can not be ordered separately


A02



anti-glare visor
*can not be ordered separately




A06



leader cable with female 4-pin waterproof connector for DMX
* specify cable length to complete order

LC4



extension cable with male and female 4-pin waterproof connector for DMX
* specify cable length to complete order

EC4

Ordering Information

example: 0819W240.0009.4130K.01+A02

0819W240 · [] · [] · [] + []

product	beam angle		light colour / CCT		finish colour	accessory	
DELTA-36-240W	0009	9°	4130K	RGB+3000K	01 RAL9023	A02	honeycomb louvre
	0015	15°	4140K	RGB+4000K		A06	anti-glare visor
	0020	20°				LC4	leader cable
	0030	30°				EC4	extension cable
	0045	45°					
	1560	15°x60°					