




PRODUCT DATASHEET

Last information update: Mar. 2025

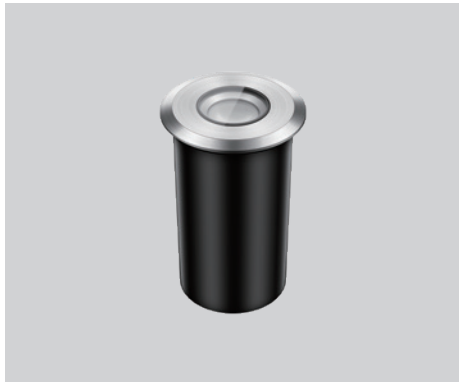

Wiring

Power/DMX input cable OPEN END 1,000 mm

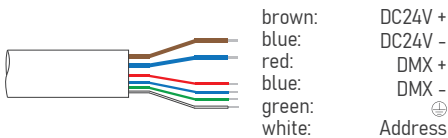

SONAX MINI

1920W1.5

In-ground LED uplighter for outdoor applications

Technical Features

Power	1.5W
Input voltage	DC24V (constant voltage)
Insulation class	III
Delivered flux	45 lm $\pm 10\%$
Light distribution type	Symmetrical
Beam angle	12°, 20°, 30°, 45°, 120°
Light colour / CCT	RGB
CRI	-
Source type	LED (3-IN-1)
LED number	1
MacAdam step	-
Power supply	Not included
Control	DMX512 (built-in DMX decoder)
Protection index	IP67
Impact resistance	IK10
Lifetime	50,000 hours Ta=25°C

Construction

Stainless steel body, stainless steel trim, tempered glass cover, polycarbonate optical lenses, plastic recessed box.

Temperature Limits

Ambient operating temperature	from -20°C to +50°C
Storage temperature	from -40°C to +70°C


Installation

Ground recessed with recessed box (standard).

Finish Colours


Trim in Stainless Steel (standard). Other RAL colours on request.

Optional Accessories



honeycomb louvre
*can not be ordered separately

A02



frosted glass
*can not be ordered separately

A05

Ordering Information

example: 1920W1.5.0012.31RGB.01+A02

1920W1.5 · [] · [] · [] + []

product	beam angle	light colour / CCT	finish colour	accessory
SONAX MINI 1.5W	0012 12°	31RGB RGB	01 stainless steel	A02 honeycomb louvre
	0020 20°			A05 frosted glass
	0030 30°			
	0045 45°			
	0120 120°			