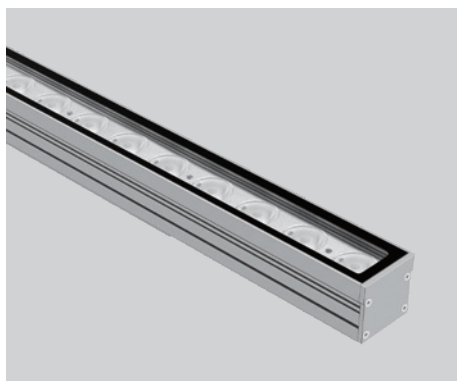


PRODUCT DATASHEET

Last information update: Mar. 2025




YORK-M

Linear LED wallwasher for outdoor applications

2504W95

Technical Features

Power	95W
Input voltage	AC100-240V
Insulation class	I
Delivered flux	4,750 lm ±10%
Light distribution type	Symmetrical
Beam angle	Ultra spot 3°
Light colour / CCT	2700K, 3000K, 4000K
CRI	80
Source type	LED
LED number	20
MacAdam step	5
Power supply	Integrated
Control	ON/OFF
Protection index	IP66
Impact resistance	IK07
Lifetime	50,000 hours Ta=25°C



Construction

High weather-resistant fluorocarbon painted extruded aluminum body, tempered glass cover, polycarbonate optical lenses.

Temperature Limits

Ambient operating temperature	from -20°C to +50°C
Storage temperature	from -40°C to +70°C

Installation

Surface mounted with adjustable bracket (standard).

Finish Colours






RAL9023 Pearl Dark Grey (standard). Other RAL colours on request.

Wiring

Power input cable OPEN END 200 mm



Optional Accessories

	honeycomb louvre *can not be ordered separately		A02
	anti-glare visor *can not be ordered separately		A06
	long bracket (for wall mounted installation) *can not be ordered separately		A19

Ordering Information

example: 2504W95.0003.2780.01+A02

2504W95 · [] · [] · [] + []

product	beam angle	light colour / CCT		finish colour		accessory	
YORK-M-95W ultra spot	0003 3°	2780	2700K RA80	01	RAL9023	A02	honeycomb louvre
		3080	3000K RA80			A06	anti-glare visor
		4080	4000K RA80			A19	long bracket