

PRODUCT DATASHEET

Last information update: May 2023




HIGHLAND

0821W800

Architectural LED floodlight for outdoor applications

Technical Features

Power	800W
Input voltage	AC100-240V
Insulation class	I
Delivered flux	64,000 lm ±10%
Light distribution type	symmetrical / elliptical
Beam angle	4.5°, 8°, 12°, 20°, 30°, 45°, 60° 5°x20°, 10°x70°
Light colour / CCT	2700K, 3000K, 4000K
CRI	80
Source type	LED
LED number	96
MacAdam step	5
Power supply	Built-in
Control	ON/OFF
Protection index	IP66
Impact resistance	IK08
Lifetime	50,000 hours Ta=25°C

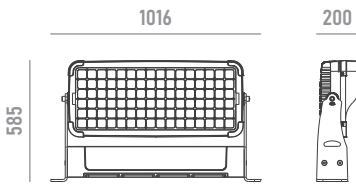

Construction

Fluorocarbonate powder painted die-cast aluminum body, tempered glass cover, polycarbonate optical lenses.

Temperature Limits

Ambient operating temperature	from -20°C to +50°C
Storage temperature	from -40°C to +70°C

Installation

Surface mounted with adjustable bracket.

Finish Colours


RAL9023 as standard colour, other RAL colours on request.

Wiring

Power input cable OPEN END 500mm



Optional Accessories



built-in anti-glare accessory for improved visual comfort
 *can not be ordered separately

honeycomb

Ordering Information

example: 0821W800.0004.2780.01+A1

0821W800 · [] · [] · [] + []

product	beam angle	light colour / CCT	finish colour	accessory
HIGHLAND 800W	0004 4.5°	2780 2700K RA80	01 RAL9023	A1 honeycomb
	0008 8°	3080 3000K RA80		
	0012 12°	4080 4000K RA80		
	0020 20°			
	0030 30°			
	0045 45°			
	0060 60°			
	0520 5°x20°			
	1070 10°x70°			